

Specifications

Thermodynamic cycle		Diesel 4 stroke
Air intake		TAA
Arrangement		6L
Bore x Stroke	mm	104 x 132
Total displacement	l	6.7
Valves per cylinder	n.	4
Cooling system		liquid
Direction of rotation (viewed facing flywheel)		CCW
Engine management		electronic
Injection system		Electronic Common Rail (E.C.R.)

Electrical system

Voltage	V	12
---------	---	----

Standard configuration

Flywheel housing	type	SAE 3
Flywheel size	inch	11 ½
Air filter		rear side
Turbocharger		Waste Gate (water cooled) Turbo with Aftercooler (TAA)
Double water circuit heat exchanger		tube type
Exhaust cooled elbow		-
Water charge tank		included
Fuel filter	n.	left side
Fuel prefilter		included (loose)
Fuel pump		included
Oil filter	n.	1 - right side
Oil sump		aluminium
Oil vapours blow-by circuit		rear
Oil heat exchanger		built in the crankcase
Oil filler		on timing cover
Starting motor		12V - 3kW
Alternator		12V - 70A
Engine stop device		by electronic central unit
Wiring harness		with EDC (Engine Diesel Control)
Painting	color	white "ICE"

Not included in the standard configuration


Battery - minimum capacity recommended		12 Ah
Battery - minimum cold cranking capacity recommended		900 A

FPT OFFERS THE WIDEST AVAILABILITY OF ENGINE BUILD OPTIONS TO CUSTOMER SPECIFIC REQUIREMENTS WITHIN THE ENGINE SUPPLY. TO FIND OUT MORE ABOUT THE CONFIGURATIONS AND ACCESSORIES WHICH ARE AVAILABLE, CONTACT THE FPT SALES NETWORK.

Rating type		A1
Maximum power [*]	kW(HP)	368 (500)
At speed	rpm	3000
Maximum no load governed speed at max rating	rpm	3150
Minimum idling speed	rpm	600
Mean piston speed at rated speed	m/s	13.2
BMEP at max power	kg/cm ²	21.9
Specific fuel consumption at full load	g/kWh	216
Oil consumption at max rating	(% of fuel cons.)	≤ 0.2
Minimum starting temperature without auxiliaries	°C	-5 (SAE15W40)
Oil and oil filter maintenance interval for replacement	hours	300 (A1, A2) / 500 (B)

* **Net Power** at flywheel according to ISO 8665, after 50 hours running, Fuel Diesel EN 590. Power tolerance 5%.


Test conditions: ISO 8665, 25 °C air temperature, 100 kPa atmospheric pressure, 30 % relative humidity .

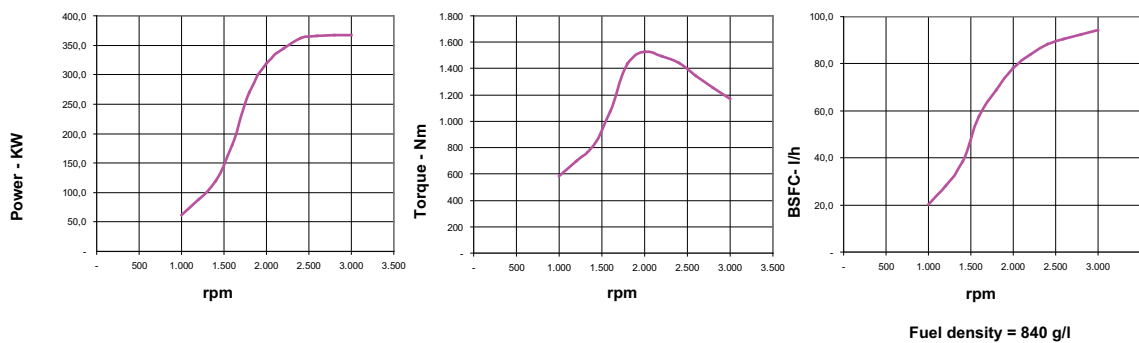

A1 = High performance crafts:
 Full throttle operation restricted within 10% of the total use period. Cruising speed at engine rpm <90% of the rated speed - Maximum useage:
 - 300 hours per year (A1 service)

Pod drive unit

Engine	POD	POD Ratios
N67 500	ZF 2800-1	1,37 - 1,46 - 1,52:1

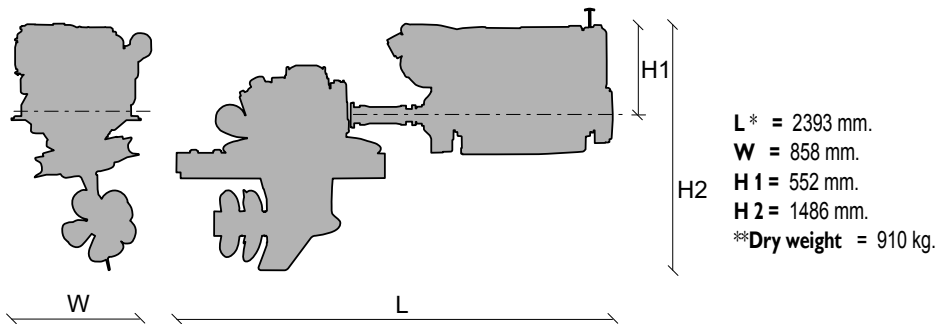

*L= Length with supported elastic joint Vulkardan E and 370mm cardan shaft
 **Dry weight without elastic joint - cardan shaft - propellers

Publication P3D06N014E - 09.11
 Specifications subject to change without notice.
 Illustrations may include optional equipment.